

# Bezpečnostní protipožární dveře do bytu Martom



M 00



B 00



G 00

**HIT**

**MODEL G 00**

- 55 RC 2 30 dB
- 55 RC 2 42 dB
- 55 RC 2 42 dB Et30 Sa, Sm
- 55-s RC 3 30 dB
- 55-s RC 3 42 dB
- 55-s RC 3 42 dB Et30 Sa, Sm

## KOLORY I ROZMIARY



Applikacja INOX, jednostronna.



GI 24

Applikacja INOX, jednostronna.



GI 04

Applikacja INOX, jednostronna.







BI 24



- 55 RC 2 30 dB
- 55 RC 2 42 dB
- 55 RC 2 42 dB EI:30 Sa, Sm
- 55-s RC 3 30 dB
- 55-s RC 3 42 dB
- 55-s RC 3 42 dB EI:30 Sa, Sm

**KOLORY I ROZMIARY**

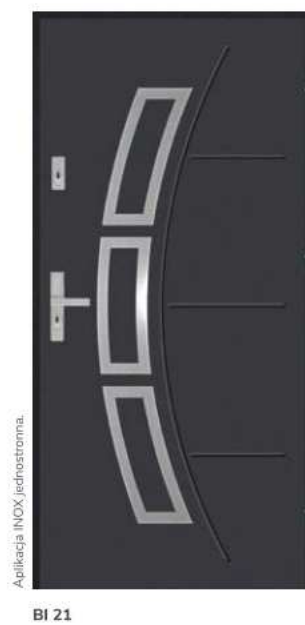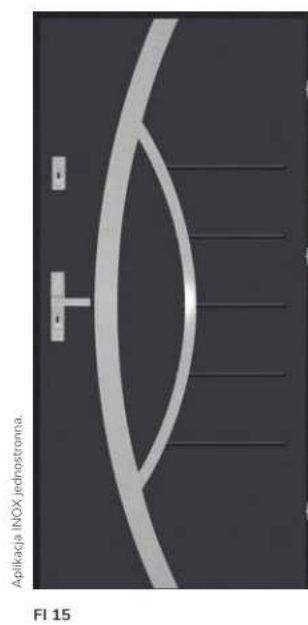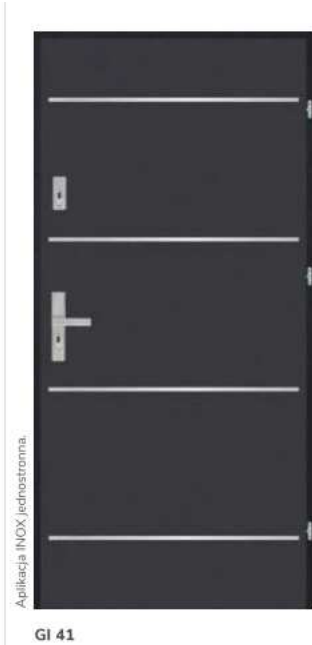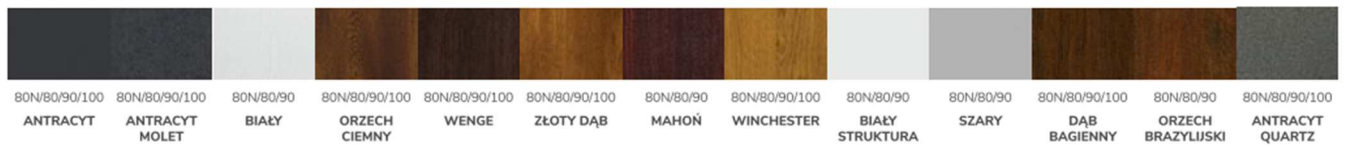



GI 42

**MODELE GI 41**

55				
	RC 2	30 dB		
55				
	RC 2	42 dB		
55				
	RC 2	42 dB	Et30	Sa, Sm
55-s				
	RC 3	30 dB		
55-s				
	RC 3	42 dB		
55-s				
	RC 3	42 dB	Et30	Sa, Sm

**MODEL GI 42, FI15, BI 21**

55				
	RC 2	30 dB		
55				
	RC 2	42 dB		
55				
	RC 2	42 dB	Et30	Sa, Sm
55-s				
	RC 3	30 dB		
55-s				
	RC 3	42 dB		
55-s				
	RC 3	42 dB	Et30	Sa, Sm

**KOLORY I ROZMIARY**

80N/80/90/100	80N/80/90/100	80N/80/90	80N/80/90/100	80N/80/90/100	80N/80/90/100	80N/80/90	80N/80/90/100	80N/80/90	80N/80/90	80N/80/90/100	80N/80/90	80N/80/90/100
ANTRACYT	ANTRACYT MOLET	BIAŁY	ORZECH CIEMNY	WENGE	ZŁOTY DĄB	MAHOŃ	WINCHESTER	BIAŁY STRUKTURA	SZARY	DĄB BAGIENNY	ORZECH BRAZYLJSKI	ANTRACYT QUARTZ



E 00



S 00



T 00

Model wykonany w płytkim tłoczeniu.



W 00

Model wykonany w płytkim tłoczeniu.



P 00

- 55 RC 2 30 dB
- 55 RC 2 42 dB
- 55 RC 2 42 dB Eł30 Sa, Sm
- 55-s RC 3 30 dB
- 55-s RC 3 42 dB
- 55-s RC 3 42 dB Eł30 Sa, Sm

KOLORY I ROZMIARY

80N/80/90/100	80N/80/90/100	80N/80/90	80N/80/90/100	80N/80/90/100	80N/80/90/100	80N/80/90	80N/80/90/100	80N/80/90	80N/80/90	80N/80/90/100	80N/80/90	80N/80/90/100
ANTRACYT	ANTRACYT MOLET	BIAŁY	ORZECH CIEMNY	WENGE	ZŁOTY DĄB	MAHOŃ	WINCHESTER	BIAŁY STRUKTURA	SZARY	DĄB BAGIENNY	ORZECH BRAZYLJSKI	ANTRACYT QUARTZ